


# Connecting an LPG Cylinder and Regulator to a Roll-about Heater Safely



## Safety Instructions

- Before connecting the LPG regulator to the gas cylinder ensure that the rubber seal on the end of the regulator is in place and is in good condition.
- NB: The cylinder valve thread is a **left hand thread** and the regulator hand-wheel must be turned in an anti-clockwise direction [when facing the cylinder valve thread opening] to engage the regulator thread correctly into the cylinder valve.
- Always make sure that the regulator is fully engaged with the cylinder valve threads and that the hand-wheel is tight. Hand tighten only. **Do not use excessive force.**
- When connecting the cylinder always check for leaks by opening the cylinder valve and then apply a soapy water solution to the joint between the cylinder valve and the regulator.
- If you find a leak, close the cylinder valve and contact the LP gas dealer who sold you the appliance.
- **When using the heater do not fully open the cylinder valve.** Only open it **one and a half turns** to prevent the possible jamming of the cylinder valve in its open position.
- The **only** way to turn off a Roll-about heater is by closing the cylinder valve. To do this turn the cylinder valve control knob in a clockwise direction. If you find that you cannot close the cylinder valve or if the heater will not shut down, carefully wheel the heater outside and away from any flammable materials and let it burn until the cylinder is empty.
- **Please “never” unscrew the regulator from the cylinder valve whilst the cylinder valve is open or if the heater is alight.**

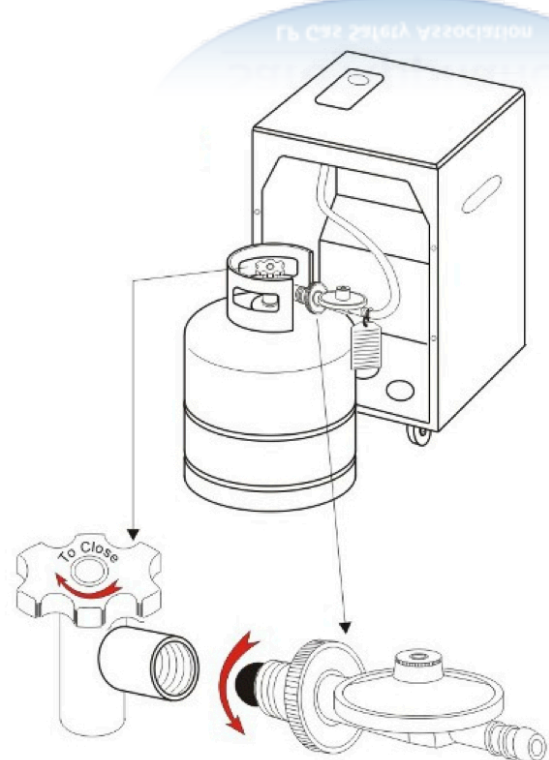

To Close the cylinder valve turn the control knob fully in the direction of the arrow

To engage and tighten the Regulator, turn the hand-wheel in the direction of the arrow

The above information is required by law<sup>1</sup> to be provided on a swing-tag attached to the regulator of all LP Gas Roll -about heaters. If you have purchased a heater which did not have this information on a swing-tag at the time of purchase please contact the retailer and request the information.

1. (South African National Standard SANS 1539)

This information is provided in the best interests of safety!